

# Best Available Copy



## CERTIFIED COPY OF PRIORITY DOCUMENT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

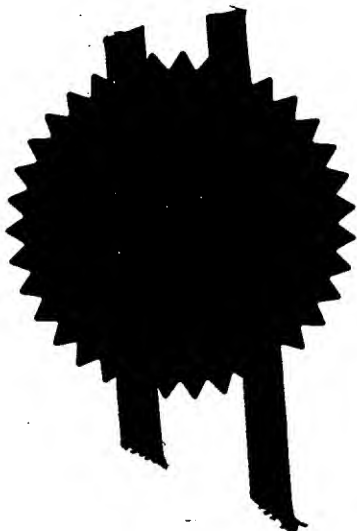

Signed

Dated

29 JUN 2000



The  
Patent  
Office

1/77

Patents Act 1977  
(Rule 16)

08FEB00 ES11304-1 D02879  
P01/7700 0.00-0002735.9

**Request for grant of a patent**

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	PHGB 000010		
2. Patent application number (The Patent Office will fill in this part)	0002735.9		-8 FEB 2000
3. Full name, address and postcode of the or of each applicant (underline all surnames)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS		
Patents ADP Number (if you know it)	7419294001		
If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4. Title of the invention	RADIO COMMUNICATION SYSTEM		
5. Name of your agent (if you have one)	KEVIN JAMES SCOTT		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA		
Patents ADP number (if you know it)	7688974001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:	YES		
a) any applicant named in part 3 is not an inventor, or			
b) there is an inventor who is not named as an applicant, or			
c) any named applicant is a corporate body.			
See note (d))			

Patents form

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	6x2
Claims(s)	3x2
Abstract	1x2
Drawings	1x2



10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents  
Statement of inventorship and right  
to grant of a patent (*Patents Form 7/77*)  
Request for preliminary examination and  
search (*Patents Form 9/77*)  
Request for substantive examination  
(*Patents Form 10/77*)  
Any other documents  
(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

7<sup>th</sup> February 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5281

K J SCOTT

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## DESCRIPTION

**RADIO COMMUNICATION SYSTEM**

5       The present invention relates to a radio communication system comprising a plurality of stations which may communicate with one another. Although the present invention is described with particular reference to a HIPERLAN/2 system, it is applicable to a wide range of other communication systems in which peer-to-peer communications are possible.

10

One example of such a communication system is HIPERLAN/2 (High Performance Radio Local Area Network type 2), currently being standardised by the European Telecommunications Standards Institute (ETSI). Such a system uses radio waves instead of a cable as the transmission medium for  
15       connecting stations. One mode of operation of HIPERLAN/2 permits peer to peer networking in which two stations can exchange data directly, instead of via an uplink transmission from the first station to a primary station and a downlink transmission from the primary station to the second station.

In a HIPERLAN/2 system, one of the stations assumes the role of a  
20       central controller which allocates transmission time slots to stations requiring them and broadcasts information about this time slot allocation information. Hence, each station in a peer to peer network knows the time slots in which it may transmit and the respective station to which it may transmit in each of these time slots. Similarly, each station knows the time slots in which it is to  
25       receive and the respective station from which it is to receive in each of these time slots.

HIPERLAN/2 transmissions use a conventional Orthogonal Frequency Division Multiplexing (OFDM) scheme with 48 (out of 64) sub-carriers used for data transmission and 4 sub-carriers for pilot signals. A variety of modulation  
30       schemes are possible, enabling data rates of between 6 and 54 Mbit/s (with BPSK and 64QAM modulation respectively).

Data is transmitted between stations in short bursts comprising a preamble of length  $16\mu\text{s}$ , subdivided into three sections, and one or more data blocks. During the preamble the receiving station's circuitry has to lock on to the received signal. The first section of the preamble comprises five specific  
5 OFDM symbols transmitted on every fourth sub-carrier, having a total duration of  $4\mu\text{s}$ . This section enables the receiving station to determine appropriate Automatic Gain Control (AGC) settings.

The second section of the preamble comprises another five specific OFDM symbols, again transmitted on every fourth carrier and having a total  
10 duration of  $4\mu\text{s}$ . This section enables the receiving station to determine the frequency offset between it and the transmitting station. The first four symbols are identical, enabling the frequency offset to be determined by observation of any rotation of the phase of the received signal — with no frequency offset the phase should remain constant.

15 The very short time periods provided in the preamble for determining the AGC setting and frequency offset place considerable demands on the receiver circuitry.

An object of the present invention is to reduce these demands placed  
20 on the receiver circuitry.

According to a first aspect of the present invention there is provided a radio communication system comprising a controller and a plurality of stations, each station comprising transmission and reception circuitry, in which peer-to-peer communication between stations takes place in time slots allocated by  
25 the controller, wherein a receiving station has means for storing information relating to a transmission parameter of each of the others of the plurality of stations and means for adjusting its receiver circuitry prior to reception of a signal from a transmitting station depending on the stored information relating to the transmission parameter of the transmitting station.

30 According to a second aspect of the present invention there is provided a station for use in a radio communication system comprising a controller and a plurality of stations, each station comprising transmission and reception

circuitry, in which peer-to-peer communication between stations takes place in time slots allocated by the controller, wherein the station has means for storing information relating to a transmission parameter of each of the others of the plurality of stations and means for adjusting its receiver circuitry prior to reception of a signal from a transmitting station depending on the stored information relating to the transmission parameter of the transmitting station.

According to a third aspect of the present invention there is provided a method of operating a radio communication system comprising a controller and a plurality of stations, each station comprising transmission and reception circuitry, in which peer-to-peer communication between stations takes place in time slots allocated by the controller, wherein a receiving station stores information relating to a transmission parameter of each of the others of the plurality of stations and adjusts its receiver circuitry prior to reception of a signal from a transmitting station depending on the stored information relating to the transmission parameter of the transmitting station.

The present invention is based upon the recognition, not present in the prior art, that storage of parameters such as frequency offset and received power level for a plurality of stations in a peer-to-peer network considerably reduces the demands placed on the receiver circuitry in a station.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a radio communication system; and

Figure 2 is a flow chart illustrating a method in accordance with the present invention for operating a station.

Referring to Figure 1, a peer-to-peer radio communication system comprises a plurality of stations 100a, 100b, 100c. The stations in this example are all identical, although one of them will have assumed the role of controller. This selection may be done in several ways, for example either by negotiation between the stations or by the first station to be activated taking the role of

controller. Each station 100a,100b,100c comprises a microcontroller ( $\mu$ C) 102 and transceiver means (Tx/Rx) 104 connected to antenna means 106. Communication between stations 100a,100b,100c takes place on a radio channels 110.

5        A typical example of such a system is an in-home network, which may for example include stations 100a,100b,100c in a television, a video recorder, a hi-fi system and a computer. Alternatively, one or more of the stations 100a,100b,100c may be stand-alone.

10        In a system made in accordance with the present invention, the microcontroller 102 in each station 100a (or 100b or 100c) stores information about signals received from the other stations 100b,100c (or 100a,100c or 100a,100b), participating in the local network. In its simplest form this information could simply be the signal strength and/or the frequency offset of the last received signal from a particular station, for example station 100b or  
15        100c in the case of the station 100a storing the information. By making use of this information, when a first station 100a is scheduled by the central controller to receive a transmission from a second station 100b it uses the stored information to make an initial adjustment of the frequency offset and gain of its receiver circuitry. Since these parameters will typically change quite slowly, the  
20        adjustments made by the receiver circuitry of the first station 100a during reception of the preamble are significantly reduced by this initial adjustment. Hence the demands on the receiver circuitry are also significantly reduced and the probability that the receiver is correctly adjusted to receive data blocks from the second station 100b is increased.

25        Other parameters relating to signals received from stations 100b,100c could also be stored. For example, if the first station 100a has an electronically steerable antenna 106 it could also store information on the direction of a second station 100b. This would enable the antenna 106 to be adjusted for optimum reception of signals from the second station 100b, improving the  
30        signal to noise ratio of the received signal. The skilled person will readily appreciate that various other parameters could usefully be stored depending on the type of system and the standard according to which it operates.

An improvement to the system disclosed above results if each station 100a stores information relating to a number of previous transmissions by each of the other stations 100b, 100c together with the time at which they were received. In this way the history of the behaviour of the signals from a particular station 100b is available, enabling a more accurate initial adjustment of the receiver circuitry of the first station 100a. For example, from measurements of the frequency offset of the second station 100b and knowledge of the present time enable the first station 100a to predict more accurately the expected frequency offset at the start of a transmission. The simplest example of this would be to determine a first order correction to the frequency offset from the time since the last transmission from the second station 100b together with the rate of drift of its frequency offset.

A method of operating the first station 100a in accordance with the present invention is illustrated in the flow chart of Figure 2. The method begins, at step 202, when the first station 100a determines that it is due to receive a transmission from the second station 100b. The first station 100a then determines, at step 204, suitable values for its receiver circuitry as described above. These values are then used, at step 206, to make an initial adjustment of the receiver circuitry. When this has been done, the first station 100a receives a preamble from the second station 100b, during which the receiver parameters are further adjusted. Finally, at step 210, the newly-determined receiver parameters are stored for later use and the data blocks are received from the second station 100b.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of radio communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation



thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of  
5 features during the prosecution of the present application or of any further application derived therefrom.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other  
10 elements or steps than those listed.

## CLAIMS

1. A radio communication system comprising a controller and a plurality of stations, each station comprising transmission and reception circuitry, in which peer-to-peer communication between stations takes place in time slots allocated by the controller, wherein a receiving station has means for storing information relating to a transmission parameter of each of the others of the plurality of stations and means for adjusting its receiver circuitry prior to reception of a signal from a transmitting station depending on the stored information relating to the transmission parameter of the transmitting station.

2. A system as claimed in claim 1, characterised in that the receiving station has means for storing a plurality of values for each transmission parameter relating to signals received at different times and means for operating on a plurality of these values to compensate for drift in the value of the transmission parameter.

3. A station for use in a radio communication system comprising a controller and a plurality of stations, each station comprising transmission and reception circuitry, in which peer-to-peer communication between stations takes place in time slots allocated by the controller, wherein the station has means for storing information relating to a transmission parameter of each of the others of the plurality of stations and means for adjusting its receiver circuitry prior to reception of a signal from a transmitting station depending on the stored information relating to the transmission parameter of the transmitting station.

4. A station as claimed in claim 3, characterised in that a transmission parameter is the frequency offset of signals from the transmitting station.

5. A station as claimed in claim 3, characterised in that a transmission parameter is the signal strength of signals from the transmitting station.

6. A station as claimed in any one of claims 3 to 5, characterised in that means are provided for storing a plurality of values for each transmission parameter relating to signals received at different times and for operating on a plurality of these values to compensate for drift in the value of the transmission parameter.

7. A method of operating a radio communication system comprising a controller and a plurality of stations, each station comprising transmission and reception circuitry, in which peer-to-peer communication between stations takes place in time slots allocated by the controller, wherein a receiving station stores information relating to a transmission parameter of each of the others of the plurality of stations and adjusts its receiver circuitry prior to reception of a signal from a transmitting station depending on the stored information relating to the transmission parameter of the transmitting station.

8. A method as claimed in claim 7, characterised by a transmission parameter being the frequency offset of signals from the transmitting station.

9. A method as claimed in claim 7, characterised by a transmission parameter being the signal strength of signals from the transmitting station.

10. A method as claimed in any one of claims 7 to 9, characterised by the receiving station storing a plurality of values for each transmission parameter relating to signals received at different times and operating on a plurality of these values to compensate for drift in the value of the transmission parameter.

11. A radio communication system substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

12. A station substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

13. A method of operating a radio communication system substantially as hereinbefore described with reference to and as shown in the  
5 accompanying drawings.


## ABSTRACT

## RADIO COMMUNICATION SYSTEM


5           In a radio communication system comprising a plurality of stations  
(100a,100b,100c) operating in a peer-to-peer mode, each station stores  
information relating to the transmission parameters of other stations. Such  
information may include the frequency offset and received signal strength of  
signals from the other stations. One station acts as central controller and  
10       allocates time slots for transmission from a first station (100a) to a second  
station (100b). Before the first station (100a) receives a signal from the second  
station (100b) it makes initial adjustments to its receiver circuitry depending on  
the stored information about previous signals received from that station (100b).  
This simplifies the task of adjusting the receiver circuitry during the preamble  
15       of the signal transmitted by the second station (100b).

(Figure 1)

1/1

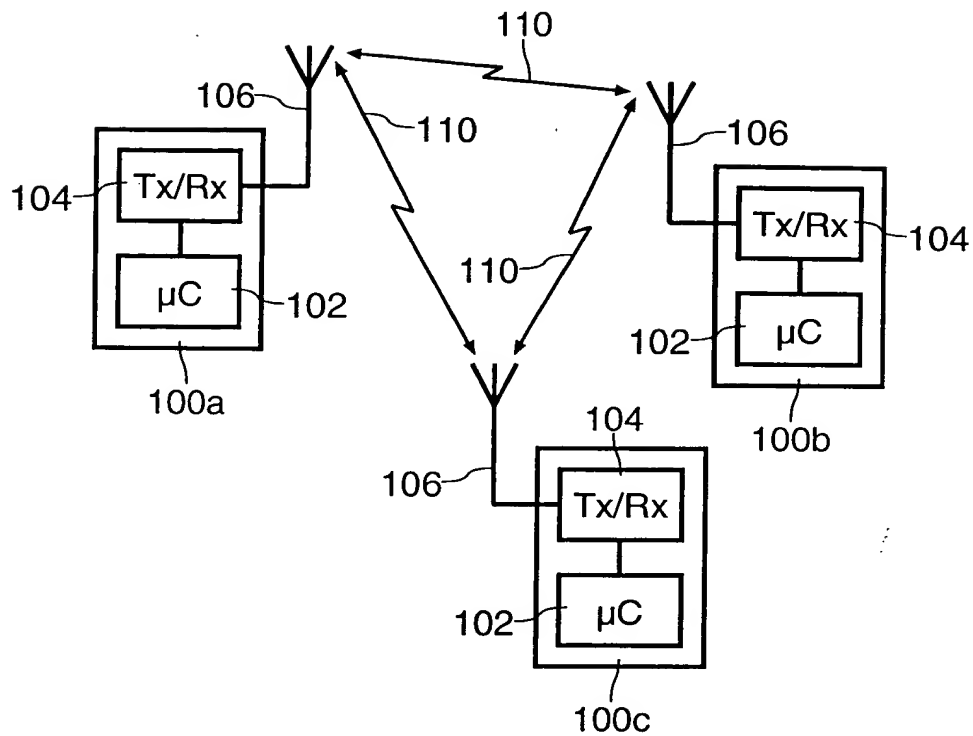

**FIG. 1**

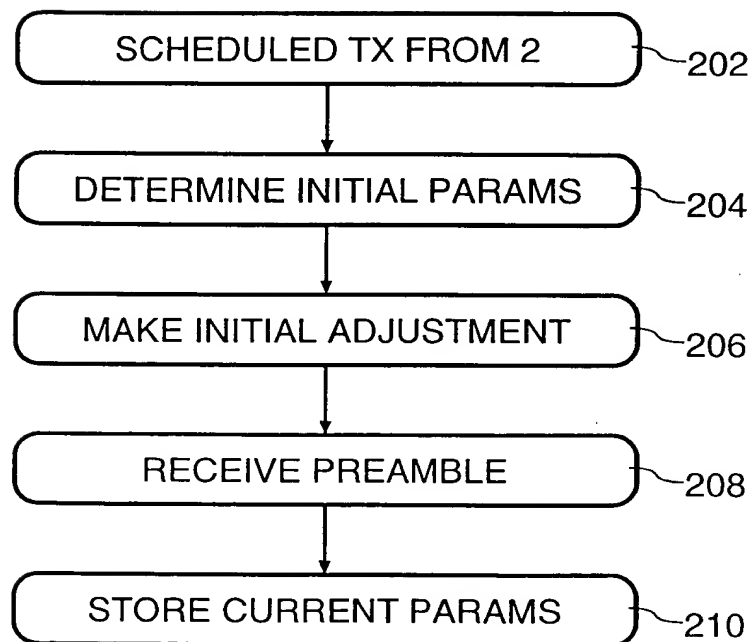

**FIG. 2**